



Stunning 4K Ultra-HD 110" Monitor - 110ITAS

Designed for commercial use, with mounting options:

- Using 1500x800 M8/30 mounting points
- Floor stand (option)

Suitable for portrait or landscape orientation

Ideal for digital signage, lobby displays, retail displays

Replaces Video Wall Displays

LCD: Equivalent in size to a 2x2, 55" LCD video wall but without the bezel seams across the display.

Direct View LED: Lower cost and higher resolution than a direct view LED video wall.




Specification

Display Type	110" TFT, LED active backlit
Display Resolution	3840 x 2160 (4K, Ultra-HD)
Aspect Ratio	16:9
Brightness	500 nit (cd/m2)
Contrast	1200:1
Colors	1.06 Billion
Response Time	8ms typical
Lifetime (backlight)	50,000 hours
Video Inputs:	
HDMI 2.0 (x2)	3840x2160 @60Hz
HDMI 1.4 (x2)	3840x2160 @30Hz
DisplayPort 1.2 (x2)	3840x2160 @60Hz
Video Outputs	DisplayPort 1.2, daisy-chain
Picture-in-Picture	2 source, 4 source quad split
Audio	Built-in speaker: 2 x 10W(Ohm)
Commands	RS-232 with RS-232 daisy-chain LAN (Optional)

User Controls	Backlight brightness, Input source selection, Picture-in-Picture functions. Bluetooth (option)
Temperature	0 to 40°C
Humidity	20-95% non-condensing
Power Consumption	500W 100 - 240VAC 50/60Hz
Mounting orientation	Portrait or landscape
Mounting Methods	Wall bracket, 1500x800mm M8 (portrait or landscape) Floor stand, optional (landscape)
Monitor Size	97.4" x 55.5" x 3.6"
Monitor Weight	176 lbs (80kg)
Shipping Size	105.5" x 68.1" x 12.6"
Shipping Weight	242 lbs (110kg)

Specifications subject to change without notice

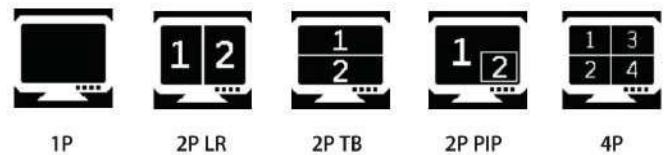

- Picture in picture modes include:
- 2 sources, side by side (Left/Right)
 - 2 sources, Top/Bottom
 - 2 sources, picture in picture
 - 4 sources, quad split

INTELLITECH GLOBAL LLC

www.intellitechglobal.com

sales@intellitechglobal.com