


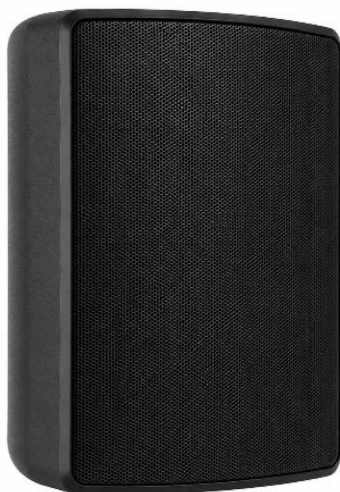

Specifications:

Model	IT-S30W
Frequency Range (-10dB)	20 Hz to 20 kHz
Coverage Angle	105°H x 100°V
Impedance	8 Ω
Power Rating	100W RMS
Maximum SPL	124 dB
Sensitivity	100 dB
Transformer Taps	70V: 60W/30W/5W/7.5W 100V: 60W/30W/15W
Drivers	LF: 8 in HF: 1.5 in
Enclosure	High Impact Polystyrene (HIPS), zinc-plated, Grille
Connectors	Phoenix

*Picture for illustration purpose only